Reed, Time Delay, and Mercury Relays and Sockets

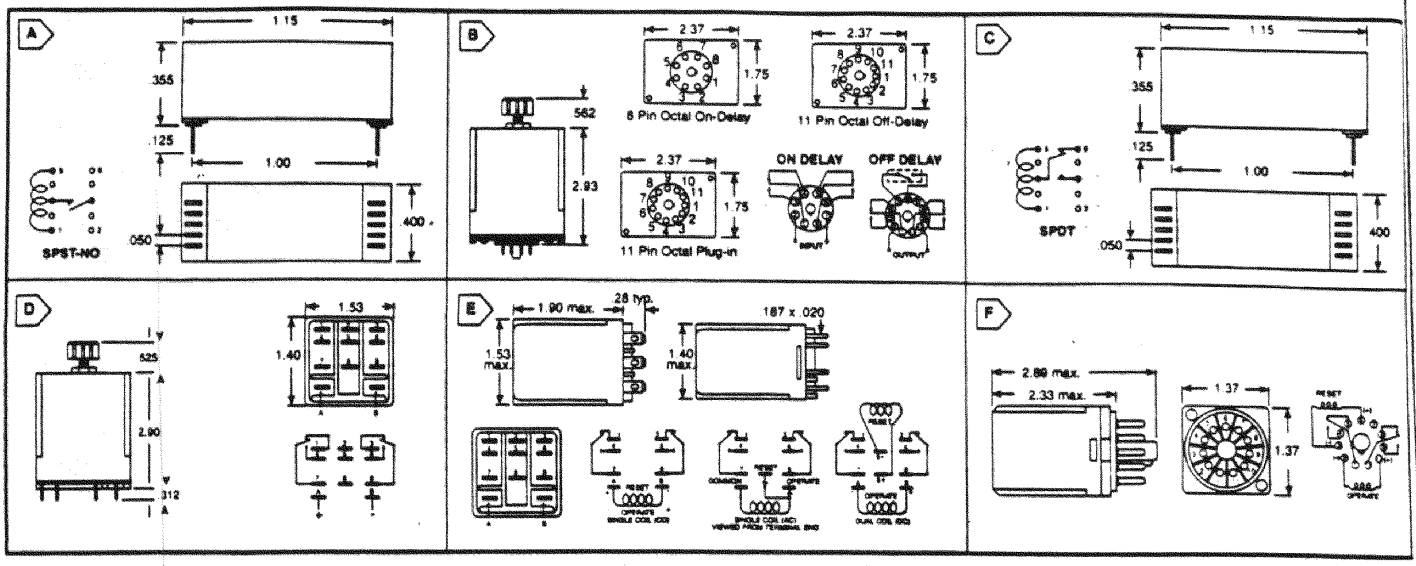

CLASS 101: DRY MINIATURE REED RELAY

Fig.	Magnecraft® Part No.	Contact		Coil		Price Each			
		Config	Rat.	Volts	Ohms	1	10	25	50
A	W101MPCX-2	SPST-NO	2A	12	1400	14.11	13.70	13.29	12.12

CLASS 211: PROGRAMMABLE TIME DELAY

E43641

• Contact rating: 10 amp • DPDT

Fig.	Magnecraft® Part No.	Nominal Input	Timing Range	Price Each			
				1	10	25	50
On Delay							
B	W211ACPSOX-18	120VAC	0.1 - 1.0 sec.	47.24	42.46	39.02	34.43
B	W211ACPSOX-5	120VAC	0.1 - 10 sec.	47.24	42.46	39.02	34.43
B	W211ACPSOX-7	120VAC	1.0 - 180 sec.	47.24	42.46	39.02	34.43
B	W211ACPSOX-8	120VAC	2.0 - 300 sec.	47.24	42.46	39.02	34.43
B	W211ACPSOX-60	120VAC	1.0 - 15 min.	47.36	42.51	39.07	34.47
B	W211ACPSOX-61	120VAC	2.0 - 30 min.	47.36	42.51	39.07	34.47
B	W211ACPSOX-62	120VAC	4.0 - 60 min.	47.36	42.51	39.07	35.62
B	W211ACPSOX-63	120VAC	8.0 - 120 min.	47.36	42.51	39.07	35.62
B	W211CPSOX-1	24VDC	0.1 - 10 sec.	46.33	40.85	37.54	34.22
B	W211CPSOX-3	24VDC	1.0 - 180 sec.	46.33	40.85	37.54	34.22
Off Delay							
B	W211ACPSRX-5	120VAC	0.1 - 10 sec.	52.11	44.22	40.63	35.85
B	W211ACPSRX-7	120VAC	1.0 - 180 sec.	52.11	44.22	40.63	35.85
B	W211ACPSRX-8	120VAC	2.0 - 300 sec.	52.11	44.22	40.63	35.85
B	W211ACPSRX-60	120VAC	1.0 - 15 min.	52.11	44.22	40.63	35.85
B	W211CPSRX-1	24VDC	0.1 - 10 sec.	51.04	41.77	38.39	35.00
B	W211CPSRX-3	24VDC	1.0 - 180 sec.	51.04	41.77	38.39	35.00

On Delay, Off Delay, One Shot and Off Delay

E43641

• Contact rating: 10 amp • DPDT • 120VAC, 50/60Hz, 24VAC/VDC on Pin 7

Fig.	Magnecraft® Part No.	Timing Range	Price Each
B	W211PROGX-1	62 programmable timing ranges	64.95

CLASS 134: MERCURY

Fig.	Magnecraft® Part No.	Contact		Coil		Price Each			
		Config	Rat.	Volts	Ohms	1	10	25	50
C	W134MPCX-1	SPDT	2A	5	60	31.03	28.86	26.52	24.18
C	W134MPCX-2	SPDT	2A	12	330	31.03	28.86	26.52	24.18

CLASS 388: ADJUSTABLE TIME DELAY

E43641

• Contact rating: 12 amp • On delay - long body

Fig.	Magnecraft® Part No.	Timing Range	Price Each			
			1	10	25	50
D	W388ACPSOX-42	.01 - 10 seconds	59.53	58.50	53.75	49.01
D	W388ACPSOX-44	1.0 - 180 seconds	59.53	58.50	53.75	49.01

CLASS 388ML: MAGNETIC LATCH RELAY

E43641

• Contact rating: 10 amp • Contact material: silver cadmium oxide, gold flashed

Fig.	Magnecraft® Part No.	Coil			Price Each			
		Config.	Volts	Ohms	1	10	25	50
AC Operated								
E	W388AMLCPX-9	Single	120	10,000	22.51	18.28	16.80	15.31
DC Operated								
E	W388MLCPX-6	Single	12	120	22.51	18.28	16.80	15.31
E	W388MLCPX-7	Single	24	470	22.51	18.28	16.80	15.31
E	W388ML2CPX-6	Dual	12	88/88	22.51	18.28	16.80	15.31
E	W388ML2CPX-7	Dual	24	350/350	22.51	18.28	16.80	15.31

CLASS 250ML: MAGNETIC LATCH RELAY

Pending

• Contact rating: 10 amp • Contact material: silver cadmium oxide, gold flashed

Fig.	Magnecraft® Part No.	Coil		Price Each			
		Volts	Ohms	1	10	25	50
DC Operated							
F	W250ML2CPX-7	12	88/88	15.49	13.86	12.56	11.44
AC Operated							
F	W250AML2CPX-8	24	52/52	15.09	13.26	12.19	11.1*
F	W250AML2CPX-9	120	1200/1200	15.09	13.26	12.19	11

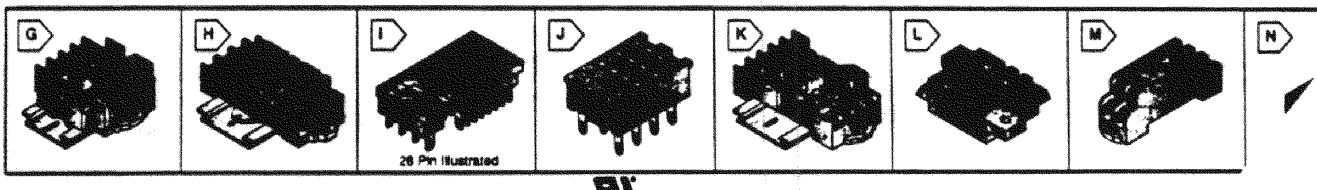

SOCKETS

E70650

	Fig.	Description	For Use With Relay	Price Each			
				1	10	25	50
*	528-464	Screw terminal, 8 pin	all standard octal	2.24	2.07	1.96	1.85
*	528-465	Screw terminal, 11 pin	all standard octal	3.36	3.11	2.94	2.77
*	528-4631	Screw terminal, 11 pin	235, 236, 388	4.20	3.89	3.68	3.47
	528-303	Solder terminal, 10 pin	67	3.23	2.50	2.36	2.23
	528-304	PC terminal, 10 pin	67	3.23	2.50	2.36	2.23
	528-305	Solder terminal, 16 pin	67	4.42	3.40	3.22	3.04
	528-306	PC terminal, 16 pin	67	4.41	3.40	3.22	3.04
	528-307	Solder terminal, 22 pin	67	4.33	3.29	3.12	2.94
	528-308	PC terminal, 22 pin	67	5.14	3.96	3.75	3.53
	528-309	Solder terminal, 28 pin	67	7.07	5.29	5.01	4.72
	528-310	PC terminal, 28 pin	67	7.07	5.29	5.01	4.72
	528-3781	Solder terminal, 14 pin	78	1.09	.87	.82	.78

For quantity

	Fig.	Description	For Use With Rel
*	528-3791	PC terminal, 14 pin	7
*	528-401	Solder terminal, 8 pin	
*	528-402	PC terminal, 8 pin	
*	528-461	Screw terminal, 14 pin	
*	528-459	Screw terminal, 8 pin	
*	528-1241	Solder terminal, 11 pin	
*	528-1242	3/16 QC terminal, 11 p	
*	528-1781	PC terminal, 11 pin	
*	528-1782	PC terminal, 11 pin,	
*	528-478	Screw terminal, 5 pin	
	528-475	Screw terminal, 8 pin	
	528-276	PC terminal, 14 pin	